




JIS FLANGES JIS 16kg/cm²

STEEL PIPE FLANGES

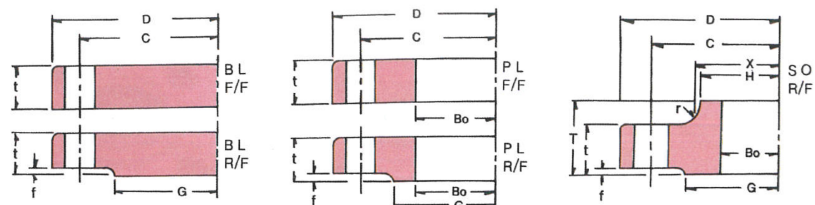

[16K]-1

(Dimensions in mm)

PIPE		PIPE		Bo (2)		D (2)		t (2)		T (2)		G (2)	
B	A												
3/8	10	17.3	17.8			90		12		16		48	
1/2	15	21.7	22.2			95		12		16		52	
3/4	20	27.2	27.7			100		14		20		58	
1	25	34.0	34.5			125		14		20		70	
1 1/4	32	42.7	43.2	+ 0.5		135		16	+ 1.0	22		80	
1 1/2	40	48.6	49.1	- 0		140		16		24		85	± 0.8
2	50	60.5	61.1		+ 1.0	155	- 0	16		24		100	
2 1/2	65	76.3	77.1			175		18		26		120	
3	80	89.1	90.0			200		20		28		135	
3 1/2	90	101.6	102.6			210		20		30	± 1.0	145	
4	100	114.3	115.4			225		22		34		160	
5	125	139.8	141.2			270		22		34		195	
6	150	165.2	166.6			305		24		38		230	
7	175	190.7	192.1		+ 1.0	325		26		40		250	
8	200	216.3	218.0	- 0		350		26		40		275	
9	225	241.8	243.7		+ 1.5	385	- 0	26		40		325	
10	250	267.4	269.5			430		28		44		345	± 0.9
12	300	318.5	321.0			480		30	+ 1.5	48		395	
14	350	355.6	358.1			540		34	- 0	52		440	
16	400	406.4	409.0			605		38		60		495	
18	450	457.2	460.0		+ 1.5	675		40		64		560	
20	500	508.0	511.0	- 0		730		42		68		615	
22	550	558.8	562.0		+ 2.0	795	- 0	44		70		670	
24	600	609.6	613.0			845		46		74		720	
26	650	660.4	664.0		+ 2.0	895		48		77	± 1.5	770	
28	700	711.2	715.0	- 0		960		50		80		820	± 1.0
30	750	762.0	766.0			1020		52		83		880	
32	800	812.8	817.0		+ 2.5	1085		54		86		930	
34	850	863.6	868.0	- 0		1135	+ 2.5	56		89		980	
36	900	914.4	919.0		- 0	1185		58		93		1030	
40	1000	1016.0	1021.0			1320		62		99		1140	
44	1100	1117.6	1123.0			1420		66	+ 2.0	105		1240	
48	1200	1219.2	1225.0			1530		70	- 0	112		1350	
52	1300	1320.8	1326.0		+ 3.0	1645		74		—		1450	± 1.2
54	1350	1371.6	1377.0	- 0		1700	+ 3.0	76		—	± 2.0	1510	
56	1400	1422.4	1428.0			1755	- 0	78		—		1560	
60	1500	1524.0	1529.0			1865		80		—		1670	

JIS FLANGES JIS 16kg/cm²



STEEL PIPE FLANGES

BLIND

PLATE

SLIP-ON



[16K]-2

(Dimensions in mm)

f	r	H (2)	X (2)	C (2)	Number of Holes	Bolt Diameter	kg/pc		
							PL	SO	BL
1	4	26	28	65	4	15	0.5	0.5	0.6
1	4	30	32	70	4	15	0.6	0.6	0.6
1	4	38	42	75	4	15	0.7	0.8	0.8
1	4	46	50	90	4	19	1.2	1.2	1.3
2	5	56	60	100	4	19	1.5	1.6	1.7
2	5	62	66	105	4	19	1.6	1.7	1.8
2	5	76	80	120	8	19	1.7	1.8	2.1
2	5	94	98	140	8	19	2.4	2.6	3.1
2	6	108	112	160	8	23	3.5	3.7	4.5
2	6	120	124	170	8	23	3.7	4.0	5.0
2	6	134	138	185	8	23	4.5	4.9	6.3
2	6	164	170	225	8	25	6.5	7.0	9.2
2	6	196	202	260	12	25	8.7	9.6	12.8
2	6	216	222	280	12	25	10.7	10.9	16.5
2	6	244	252	305	12	25	10.9	12.1	18.6
2	6	266	272	335	12	27	13.9	14.1	23.1
2	6	304	312	380	12	27	18.0	20.0	30.6
3	8	354	364	430	16	27	21.5	24.4	40.7
3	8	398	408	480	16	33	30.8	35.0	57.8
3	10	446	456	540	16	33	42.8	46.2	82.2
3	10	504	514	605	20	33	55.1	61.9	107.6
3	10	558	568	660	20	33	65.1	73.3	133.1
3	10	612	622	720	20	39	77.9	88.1	164.1
3	10	666	676	770	24	39	86.0	98.8	193.2
5	10	704	726	820	24	39	96.3	101.0	227.5
5	10	754	776	875	24	42	114.1	120.0	272.6
5	10	806	832	935	24	42	132.7	141.0	321.9
5	10	865	885	990	24	48	152.1	161.0	375.6
5	10	916	936	1040	24	48	166.5	177.0	428.1
5	10	968	986	1090	28	48	178.1	191.0	481.8
5	12	1070	1098	1210	28	56	235.3	230.0	636.0
5	12	1180	1200	1310	32	56	267.9	289.0	784.0
5	12	1282	1302	1420	32	56	321.1	348.0	972.4
5	—	—	—	1530	32	62	378.6	—	1185.2
5	—	—	—	1590	32	62	410.0	—	1303.8
5	—	—	—	1640	36	62	436.0	—	1422.5
5	—	—	—	1750	36	62	496.4	—	1656.6